



GUTTER SECTION #1
(PREFERRED)

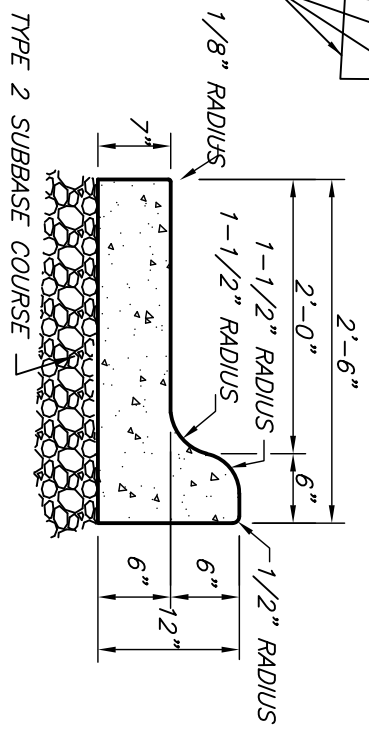

GUTTER SECTION #2

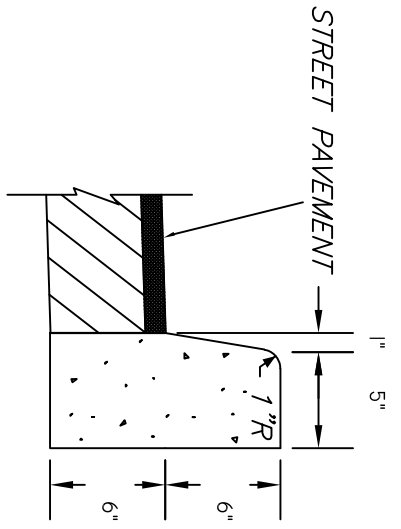

CURB SECTION #3

TYPICAL CURB & GUTTER SECTIONS

NTS

GENERAL NOTES

1. CONCRETE GUTTER/CURB SHALL BE 3500 PSI CONCRETE WITH 4"x4" - W2.9XW2.9 WELDED WIRE FABRIC.
- STANDARDS
1. NYS DOT SPECIFICATIONS

ISSUE DATE: SEPTEMBER 2018

TOWN & VILLAGE OF ELLICOTTVILLE

REVISIONS	DATE	COMMENTS

EVL ENG DEPT.

HIGHWAY - H-04

